

Palm Grip

B26



The Palm Grip B26 has different equipment options for many requirements. It is compatible with our Multi-axis Controller or mounted on Hydraulic Drives. The Palm Grip has a highly flexible single wire (0,1 mm², 450 mm long). The mounting piece for the drive rod can be supplied with a tapped hole 12 mm (standard) or 10 mm.

Technical data

Operating temperature	-40°C to +85°C
Degree of protection	Control element up to IP67
Contact complement	1,5A 24 V DC 13 (*1 0,1A 24 V DC13)



Example

B26L -2D HD W S12 V21 H13 -X

Basic unit

B26L	Palm Grip left
B26R	Palm Grip right

Digital actuating element

D	Push Button KDA21 *1 Colour: red, black, yellow, green, blue, white, orange
HD	Hall-push Button (see page 167)
W	Rocker switch momentary (T) or maintained (R), colours: red, black, yellow, blue, white Mechanical functions: T-0-T, 0-T, R-0-T, R-0-R, 0-R, R-R
SR	Sliding switch R-O-R
ST	Sliding Button T-O-T
SE	Sensor Button capacitive with external control electronics
S	Sensor Button capacitive without external control electronics (Consistent with V85 / VV85 with interface E1xx to E6xx, E907 and V25/V27 with interfaces E3xx + E4xx)
V	Vibration

Analog actuating element




S12	Hall-Thumb rocker (see page 108) Output 0,5...2,5...4,5 V inverse dual
V21	Hall-Minijoystick (see page 53) Output 0,5...2,5...4,5 V inverse dual
HK	Hall-cross Switch (see page 164)
H13	Hall-Rotary Grip Output 0,5...2,5...4,5 V inverse dual

Special model

X	Special / customer specified
---	------------------------------



B26R

Edition:
Push button installed Pos. 1-12
Rocker switch installed Pos. 13

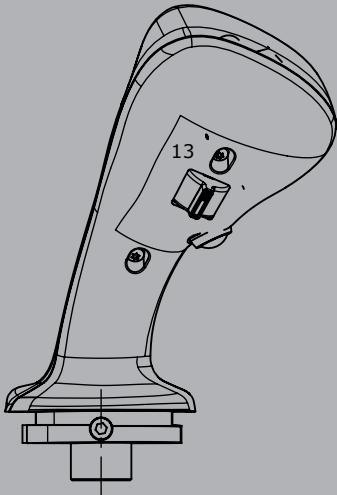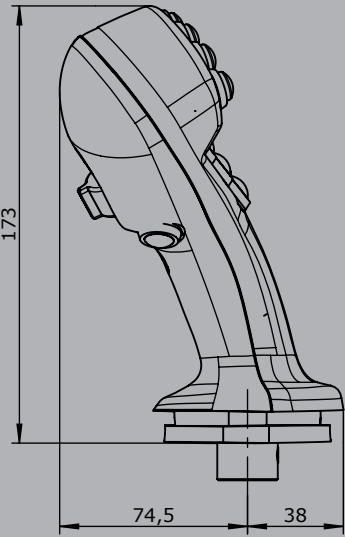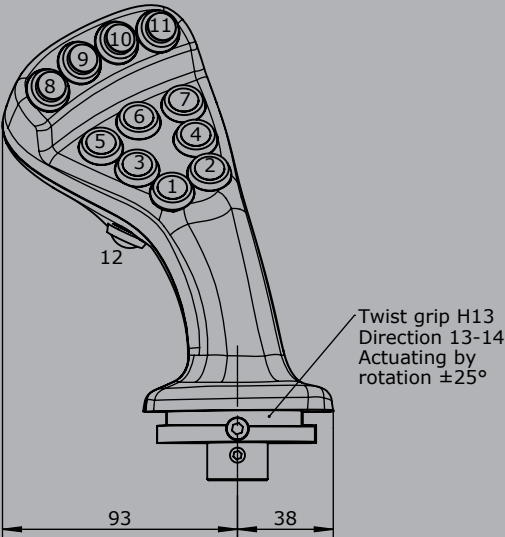

B26L

Edition:
Push button installed Pos. 1-12
Rocker switch installed Pos. 13

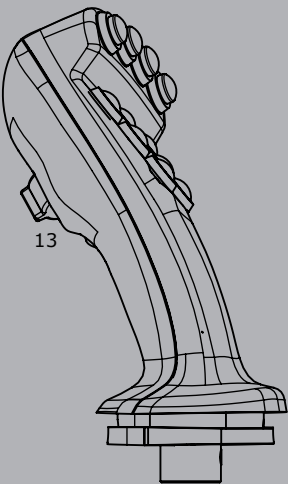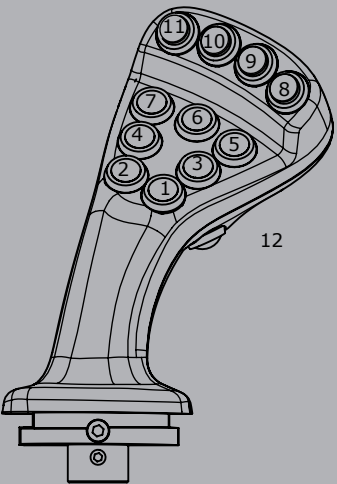

Edition:
Push button installed Pos. 1+2, 8-12
Rocker switch installed Pos. 3+5, 4+7

