

Palm Grip

B32



The Palm Grip B32 has different equipment options for many requirements. It is compatible with our Multi-axis Controller or mounted on Hydraulic Drives. The Palm Grip has a highly flexible single wire (0,1 mm², 450 mm long). The mounting piece for the drive rod can be supplied with a tapped hole 12 mm (standard) or 10 mm.

Technical data

Operating temperature	-40°C to +85°C
Degree of protection	Control element up to IP67
Contact complement	1,5A 24 V DC 13 (*1 0,1A 24 V DC13)






		Example				
		B32L	-2D	W	SE	S12
Basic unit						
B32L	Palm Grip left					
B32R	Palm Grip right					
Digitale actuating element						
D	Push Button KDA21 *1					
	Colour: red, black, yellow, green, blue, white, orange					
HD	Hall-push Button (see page 167)					
W	Rocker switch momentary (T) or maintained (R), colours: red, black, yellow, blue, white					
	Mechanical functions: T-0-T, 0-T, R-0-T, R-0-R, 0-R, R-R					
SE	Sensor Button capacitive with external control electronics					
S	Sensor Button capacitive without external control electronics					
	(Consistent with V85 / VV85 with interface E1xx to E6xx, E907 and V25/V27 with interfaces E3xx + E4xx)					
Analog actuating element						
S12	Hall-Thumb rocker (see page 108)					
	Output 0,5...2,5...4,5 V inverse dual					
V21	Hall-Minijoystick (see page 53)					
	Output 0,5...2,5...4,5 V inverse dual					
HK	Hall-cross Switch (see page 164)					
Special model						
X	Special / customer specified					


Technical details may vary based on configuration or application! Technical data subject to change without notice!

B32


Push button
installed Pos. 1 - 8, 11 - 13
Rocker switch
installed Pos.9

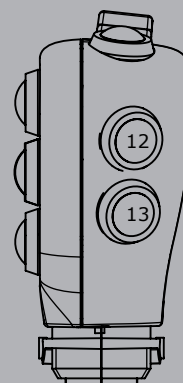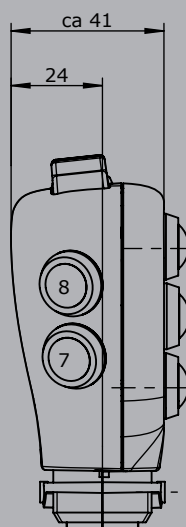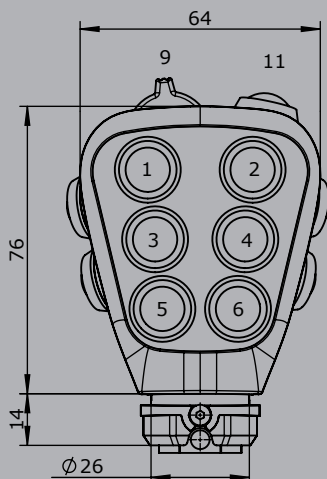


Push button
installed Pos. 1 - 8, 12 + 13
Rocker switch lengthwise
installed Pos. 10

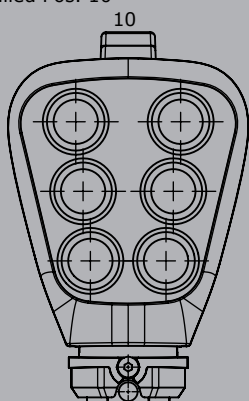


Rocker switch crosswise
installed Pos. 10

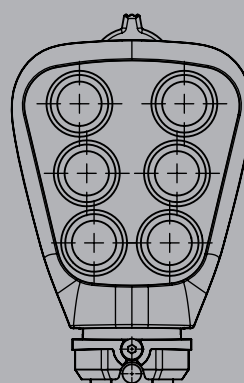

Edition:
Multi-axis controller V21
installed Pos. 1/3
(Pos. 9 - 11 not available)



Edition:
Rocker switch
installed Pos. 5/6



Edition:
Rocker switch
installed Pos.1/3 + 2/4
(Pos. 9 - 11 not available)

