

Single-axis Controller

S27



The Single-axis Controller S27 is a hall sensor switching device designed for electro-hydraulic and remote controlled hydraulic. The modular design of the switching device is universally applicable. The Single-axis Controller is resistant to oil, maritime conditions e.g. offshore /vessels, UV radiation typically from the sun.


Technical data

Mechanical life S27	6 million operating cycles
Operating temperature	-40°C to +85°C
Degree of protection	up to IP65, electronic assembly IP67
Functional safety	PLd compatible (EN ISO 13849, complies SIL2 to DIN EN IEC 61508)



	S27L	M	- Z	- E...	- S...	- X
Basic unit						
S27L left						
S27R right						
Grip / palm grip						
Knob (standard)						
M Mechanical zero interlock						
Q T-grip						
Z Spring return						
R Friction brake						
Interface (description on the following pages)						
E0xx Digital output						
E1xx Voltage output						
E2xx Current output						
Plug connectors						
S.. Standard plug connectors (see page 149)						
Special model						
X Special / customer specific						

Identification of the installation variants with switching directions:

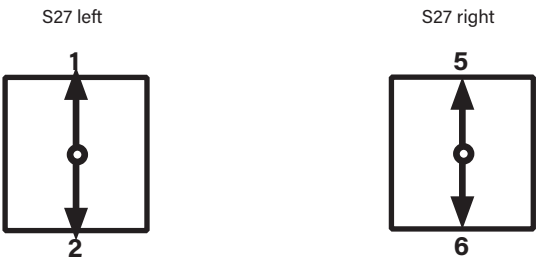

Technical details may vary based on configuration or application! Technical data subject to change without notice!

Single-axis Controller

S27



1

Digital Output			
Supply voltage	9-32 V DC		
Current carrying capacity	Direction signal 150 mA		
	Zero position signal 500 mA		
Wiring	Cable 500 mm long without plug connector		
	Optional with plug connector (<i>standard plug connectors see page 149</i>)		S
2 direction signals + 1 zero position signal (galvanically isolated)			
	1 axis		E001 1

Voltage output (not stabilized)			
Supply voltage	4,75-5,25 V DC		
Current carrying capacity	Direction signal 8 mA		
Wiring	Cable 500 mm long without plug connector		
	Optional with plug connector (<i>standard plug connectors see page 149</i>)		S
0,5...2,5...4,5 V redundant + 2 direction signals			
	1 axis		E104 1
	Output options Characteristic: Inverse dual 1 Dual 2 Inverse dual with dead zone +/- 3° (standard) 3 Dual with dead zone +/- 3° 4		

Voltage output			
Supply voltage	9-32 V DC (*11,5-32 V)		
Current carrying capacity	Direction signal 150 mA		
	Zero position signal 500 mA		
Wiring	Cable 500 mm long without plug connector		
	Optional with plug connector (<i>standard plug connectors see page 149</i>)		S
0,5...2,5...4,5 V redundant + 2 direction signals + 1 zero position signal (galvanically isolated)			
	1 axis	E112 1	
0...5...10 V redundant + 2 direction signals + 1 zero position signal (galvanically isolated), supply voltage 11,5 - 32 V DC			
	1 axis	E132 1	
10...0...10 V + 2 direction signals + 1 zero position signal (galvanically isolated), supply voltage 11,5 - 32 V DC, sensor redundant with error monitoring and error signal			
	1 axis	E136 1	
	Output options		
	Characteristic:		
	Inverse dual *1		1
	Dual *1		2
	Inverse dual with dead zone +/- 3° *1 (standard)		3
	Dual with dead zone +/- 3° *1		4
	*1 <i>not combinable with output E136X</i>		
	Single *2		5
	Single with dead zone *2 (standard)		6
	*2 <i>not combinable with output E112X and E132X</i>		
Voltage output with other value on request!			

S27



Supply voltage	9-32 V DC
Current carrying capacity	Direction signal 150 mA Zero position signal 500 mA
Wiring	Cable 500 mm long without plug connector Optional with plug connector (<i>standard plug connectors see page 149</i>)
0...10...20 mA + 2 direction signals + 1 zero position signal (galvanically isolated), sensor redundant with error monitoring and error signal	
	1 axis E206 1
20...0...20 mA + 2 direction signals + 1 zero position signal (galvanically isolated), sensor redundant with error monitoring and error signal	
	1 axis E208 1
4...12...20 mA + 2 direction signals + 1 zero position signal (galvanically isolated), sensor redundant with error monitoring and error signal	
	1 axis E214 1
20...4...20 mA + 2 direction signals + 1 zero position signal (galvanically isolated), sensor redundant with error monitoring and error signal	
	1 axis E216 1
Output options	
	Single 5
	Single with dead zone +/-3° (standard) 6
Current output with other value on request!	

Technical details may vary based on configuration or application! Technical data subject to change without notice!

Single-axis Controller

S27

M = Latch for mechanical zero interlock

