

Portable Control Unit

TS2



The Portable Control Unit TS2 is used for controlling and monitoring the necessary equipment. The chest panel and straps enable the operator to carry it without becoming tired. An adjustable carrying strap can also be fitted for use without the chest plate.

Surface treatment:
 Priming and structure-finishing paint
 Standard colour RAL 7032 pebble-grey

Technical data:


Operation temperature	-40°C to +85°C
Degree of protection	IP65




		Example									
		TS2	-SB 1	-RH 1	-K 3	-HS 1	/	V...	/	KLS	/ X
Basic unit											
TS2	With chest plate, straps										
TS21	With straps										
TS22	With bracket and straps										
Attachment											
SB 1	Legs for control unit alu-tube 2 pieces										
SB 2	Legs for control unit stainless steel-tube V2 A 2 pieces										
RH 1	Reeling hooks for control unit stainless steel V2 A										
K 1	Cable entry M32 cable 11 - 21 mm										
K 2	Cable entry M40 cable 19 - 28 mm										
K 3	Cable entry 180° swiveling M32 cable 11-21 mm										
HS 1	Plug in socket 16-pole male insert										
HB 1	Connector 16-pole female insert										
HS 2	Plug in socket 24-pole female insert										
HB 2	Connector 24-pole female insert										
HS 3	Plug in socket 32-pole male insert										
HB 3	Connector 32-pole female insert										
Indicating labels not engraved for multi-axis-/ single-axis Controller											
Indicating labels engraved for multi-axis-/ single-axis Controller											
Mounting for equipment boxes											
V	Multi-axis Controller (see page 1)										
S	Single-axis Controller (see page 101)										
N	Control-switch (see page 142)										
...	More command and indicating devices (see page 218)										

		TS 2	-SB 1	-RH 1	-K 3	-HS 1	/	V...	/	KLS	/	X
Cable and wiring												
Cable Oelflex Classic FD 810 P	18 x 1 mm ²	13,9 mm Ø	-5°C to +70°C	each meter								
Cable Oelflex Classic FD 810 P	25 x 1 mm ²	16,4 mm Ø	-5°C to +70°C	each meter								
Cable Oelflex Classic FD 810 P	34 x 1 mm ²	18,9 mm Ø	-5°C to +70°C	each meter								
Cable Ölflex Crane	18 x 1 mm ²	19,2 mm Ø	-25°C to +80°C	each meter								
Cable Ölflex Crane	24 x 1 mm ²	22,1 mm Ø	-25°C to +80°C	each meter								
Cable Ölflex Crane	36 x 1 mm ²	26,1 mm Ø	-25°C to +80°C	each meter								
KLS	Wired on connector / plug in socket per core											
KLK	Wiring for cable per core											
Special model												
X	Special / customer specified											
X1	Housing antistatic design < 10 ⁹ Ohm/cm											
X2	Finishing color yellow RAL 1021											



With chest plate and straps
Protection IP 65
with multi-axis controllers IP 54

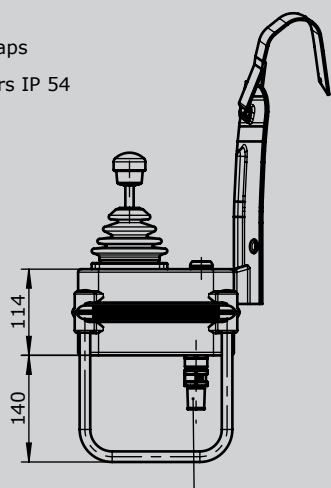


Cable entry
with anti-kink protection
and stain relief or connectors

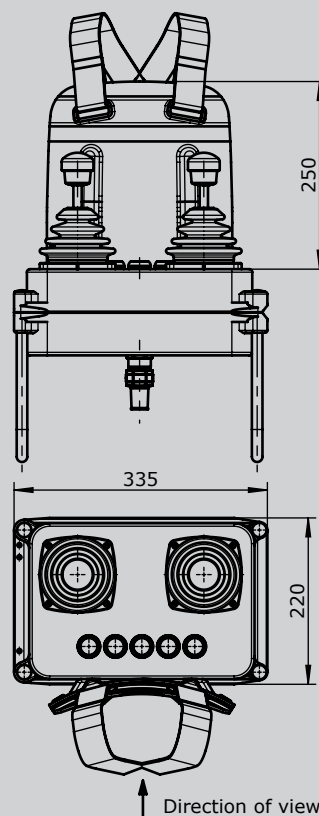

With adjustable carrying strap
Protection IP 65
with multi-axis controllers IP 54



With bracket and cable entry swivelling
Protection IP 65
with multi-axis controllers IP 54



Cable entry 180° swivelling
with anti-kink protection
and stain relief or connectors

