

Palm Grip

B28



The Palm Grip B28 has different equipment options for many requirements. It is compatible with our Multi-axis controller or mounted on Hydraulic drives. The Palm Grip has a highly flexible single wire (0,1 mm², 450 mm long). The mounting piece for the drive rod can be supplied with a tapped hole 10 mm (standard).


Technical data

Operating temperature	-40°C to +85°C
Degree of protection	up to IP54




		Example			
		B28	-2D	SE	-X
Basic unit					
B28	Palm Grip				
Digital actuating element					
D	Push Button (1,5A 24 V DC13)				
	Colour: red, black, yellow, green, blue, grey				
SE	Sensor Button capacitive with external control electronics				
S	Sensor Button capacitive without external control electronics				
	(Consistent with V85 / VV85 with interface E1xx to E6xx, E907 and V25/V27 with interfaces E3xx + E4xx)				
Special model					
X	Special / customer specified				

Edition:
Push button installed
Pos. 1,3,4,6,7,8
Sensor button function on left or right available

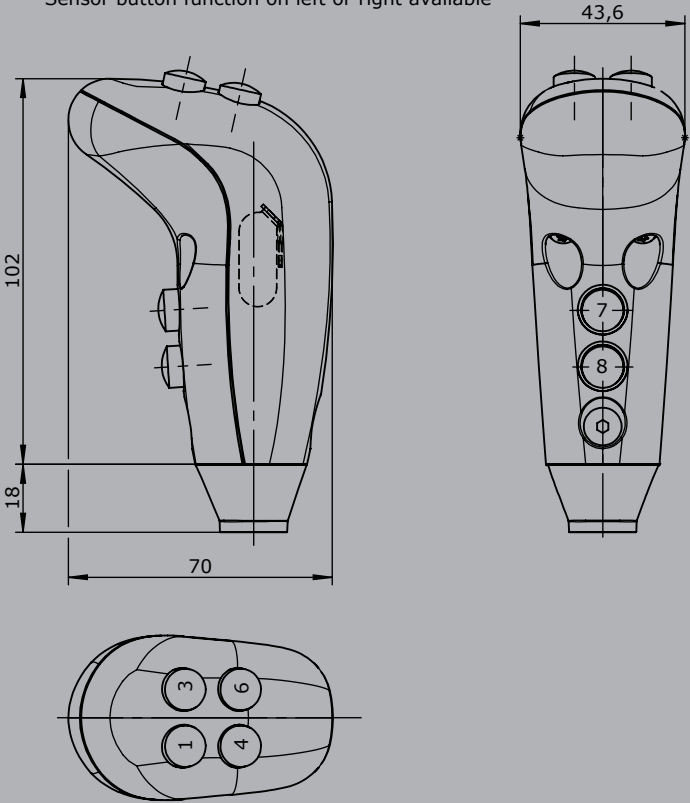

Edition:
Push button installed
Pos. 2,5,7,8
Sensor button function on left or right available



Edition:
Push button installed
Pos. 7,8,9,10
Sensor button function on left or right available

