

Palm Grip

B33



The Palm Grip B33 has different equipment options for many requirements. It is compatible with our Multi-axis Controller or mounted on Hydraulic Drives. The Palm Grip has a highly flexible single wire (0,1 mm², 450 mm long). The mounting piece for the drive rod can be supplied with a tapped hole 12 mm (standard) or 10 mm.



Technical data


Operating temperature	-40°C to +85°C
Degree of protection	Control element up to IP67
Contact complement	*1 0,1A 24 V DC13

		B33L	-2D	S12	-X
Basic unit					
B33L	Palm Grip left				
B33R	Palm Grip right				
Digitale actuating element					
D	Push Button KDA21 *1				
	Colour: red, black, yellow, green, blue, white, orange				
HD	Hall-push Button (see page 167)				
Analog actuating element					
S12	Hall-Thumb rocker (see page 108)				
	Output 0,5...2,5...4,5 V inverse dual				
Special model					
X	Special / customer specified				

Technical details may vary based on configuration or application! Technical data subject to change without notice!

B33

Edition:
Push button installed Pos. 1,2,3

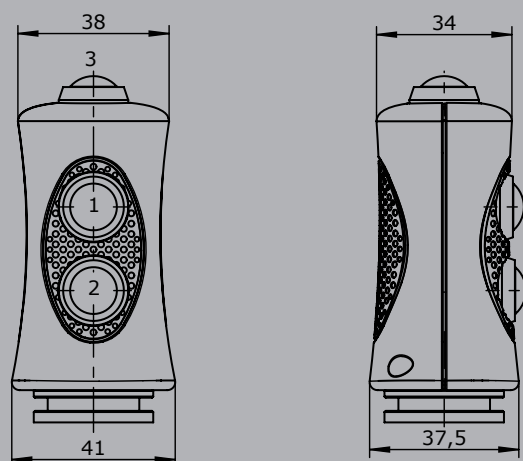

Edition:
Rocker switch installed Pos. 1+2

