

Palm Grip

B34



The Palm Grip B34 has different equipment options for many requirements. It is compatible with our Multi-axis controller or mounted on Hydraulic drives. The Palm Grip has a highly flexible single wire (0,1 mm², 450 mm long). The mounting piece for the drive rod can be supplied with a tapped hole 12 mm (standard) or 10 mm.


Technische Daten

Operating temperature	-40°C to +85°C
Degree of protection	Control element up to IP67
Contact complement	1,5A 24 V DC 13 (*1 0,1A 24 V DC13)



		B34L	Example -2D	W	S12	-X
Basic unit						
B34L	Palm Grip left					
B34R	Palm Grip right					
Digitale actuating element						
D	Push Button KDA21 *1 Colour: red, black, yellow, green, blue, white, orange					
HD	Hall-push Button (see page 167)					
W	Rocker switch momentary (T) or maintained (R), colours: red, black, yellow, blue, white Mechanical functions: T-0-T, 0-T, R-0-T, R-0-R, 0-R, R-R					
K	Lever switch					
Analog actuating element						
S12	Hall-Thumb rocker (see page 108) Output 0,5...2,5...4,5 V inverse dual					
Special model						
X	Special / customer specified					

B34

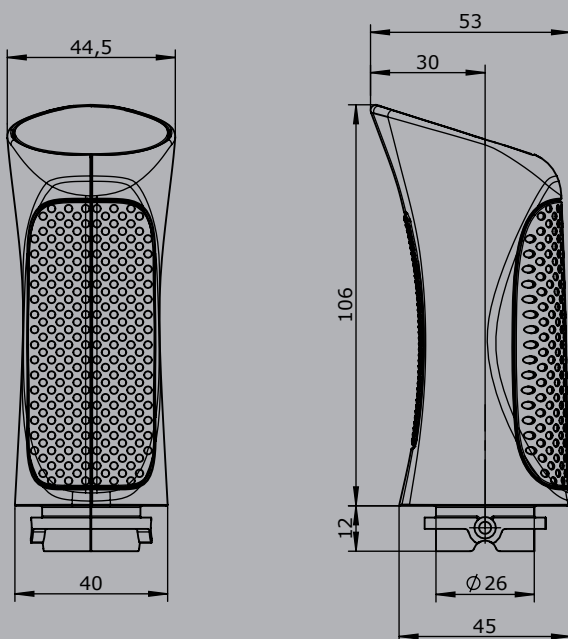

Edition:

Push button installed Pos. 1-3

Rocker switch installed Pos. 4-5

Lever switch installed Pos. 6

Position rocker switch or push button left hand ()

Edition:

Push button installed Pos. 1-3,4,5

Lever switch installed Pos. 6

