

# Palm Grip

## B14/B15



The Palm Grip B14/B15 has different equipment options for many requirements. It is compatible with our Multi-axis and Single-axis controller or mounted on Hydraulic drives. The Palm Grip has a highly flexible single wire (0,1 mm², 450 mm long). The mounting piece for the drive rod can be supplied with a tapped hole 12 mm (standard) or 10 mm.

### Technical data


|                       |                            |
|-----------------------|----------------------------|
| Operation temperature | -40°C to +85°C             |
| Degree of protection  | Control element up to IP67 |
| Contact complement    | 0,1A 24 V DC13             |



|                           |                                                        | Example |     |    |
|---------------------------|--------------------------------------------------------|---------|-----|----|
|                           |                                                        | B14     | -2D | -X |
| Basic unit                |                                                        |         |     |    |
| B14                       | Palm Grip left                                         |         |     |    |
| B15                       | Palm Grip right                                        |         |     |    |
| Digital actuating element |                                                        |         |     |    |
| D                         | Push Button KDA21 (0,1A 24 V DC13)                     |         |     |    |
|                           | Colour: red, black, yellow, green, blue, white, orange |         |     |    |
| Special model             |                                                        |         |     |    |
| X                         | Special / customer specified                           |         |     |    |

## B14

Push button installed Pos. 1,2

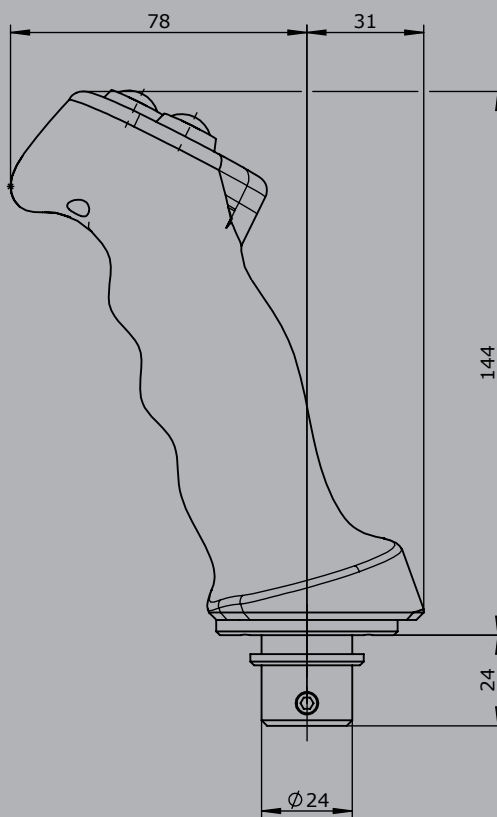

## B15

Push button installed Pos. 1,2

