# Palm Grip

B1

The Palm Grip B1 has different equipment options for many requirements. It is compatible with our Multi-axis controller or mounted on Hydraulic drives. The Palm Grip has a highly flexible cable (4 respectively 8 x 0,25 mm², 450 mm long). The mounting piece can be supplied with a tapped hole M10 (standard) or M8.

**Technical data**

| | |
|---|---|
| Operating temperature | -40°C to +85°C |
| Degree of protection | IP54 |
| Contact complement | 3A 24 V DC13 (*1 1,5A 24 V DC13) |

*Example*

| | B1 | -2D | W | -X |
|---|---|---|---|---|
| **Basic unit** | | | | |
| B1 Palm Grip | | | | |
| **Digital actuating element** | | | | |
| D Push Button top | | | | |
| D Push Button side *1 | | | | |
| W Rocker switch top T-0-T | | | | |
| W Rocker switch top R-0-T | | | | |
| W Rocker switch top R-0-R | | | | |
| T Push Button top with mechanical operation | | | | |
| *(Only possible with multi-axis controller or single-axis controller!)* | | | | |
| K Lever switch | | | | |
| KT Lever switch mechanical operation | | | | |
| *(Only possible with multi-axis controller or single-axis controller!)* | | | | |
| **Special model** | | | | |
| X Special / customer specified | | | | |

2

Technical details may vary based on configuration or application! Technical data subject to change without notice!

2

Edition:
Push button installed Pos. 1,2,3,4

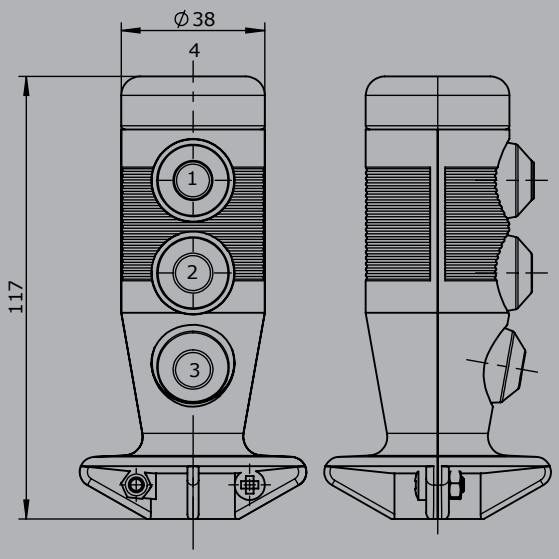


Edition:
Rocker switch installed Pos. 4
Push button installed Pos. 2,3

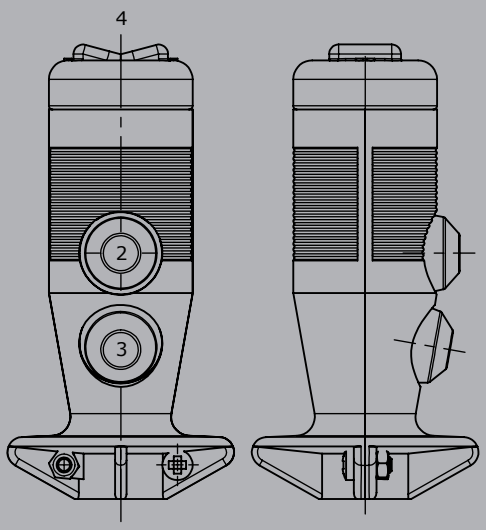


Edition:
Lever switch installed side

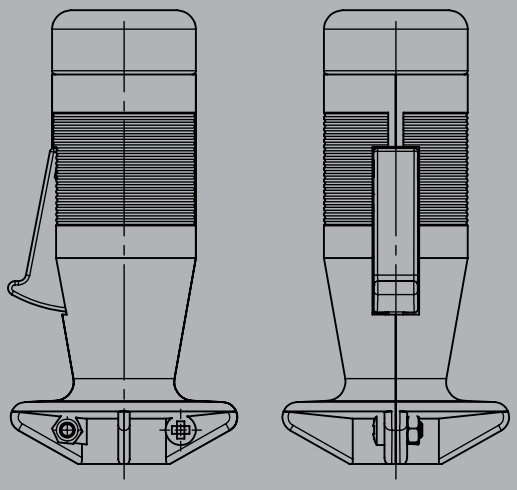

Technical details may vary based on configuration or application! Technical data subject to change without notice!



V2020/1 09.03.2020